


ADAPTIVIEW SERIES

VERSATILE AND ADAPTABLE | DIRECT VIEW LED CABINET

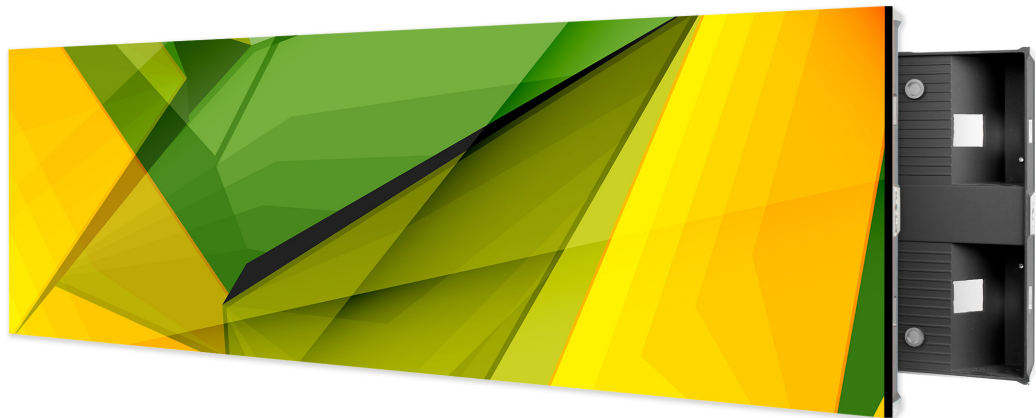

WWW.TINNOX.COM.AU | © UFL TECHNOLOGY PTY LTD. All rights reserved.
All specifications and descriptions are subject to change without prior notice. Unauthorized reproduction is strictly prohibited.


TINNOX

SPECIFICATIONS

Pixel pitch (mm)	1.9	2.6	2.9	3.9
Pixel configuration	1R1G1B			
Led lamp (Black LED)	SMD1010	SMD1515		SMD2121
Pixel density (dot/m ²)	262144	147456	112896	65536
Module size (W×H) mm	250x250			
Module resolution (W×H) dot	128x128	96x96	84x84	64x64
Cabinet size (W×H) mm	1000x250 / 750x250 / 500x250			
Cabinet material	Diecast aluminum			
Cabinet weight	24 (kg/m ²)			
Scan mode	1/32			
Gray scale	14-Bit			
Protection level	IP30			
Maintenance	Front maintenance			
Brightness	700 - 1100 Nit			
Viewing angle	140° H / 140° V			
Contrast ratio	≥6000:1			
Refresh rate	1920Hz			
Input power	AC 110V - 240V			
Max. Power consumption	≤650 (W/m ²)			
Ave. Power consumption	≤200 (W/m ²)			
Working temperature	-20 °C ~ +80 °C			
Lifetime	100,000 Hrs (At 50% brightness)			

DIMENSIONS

1000x250MM CABINET

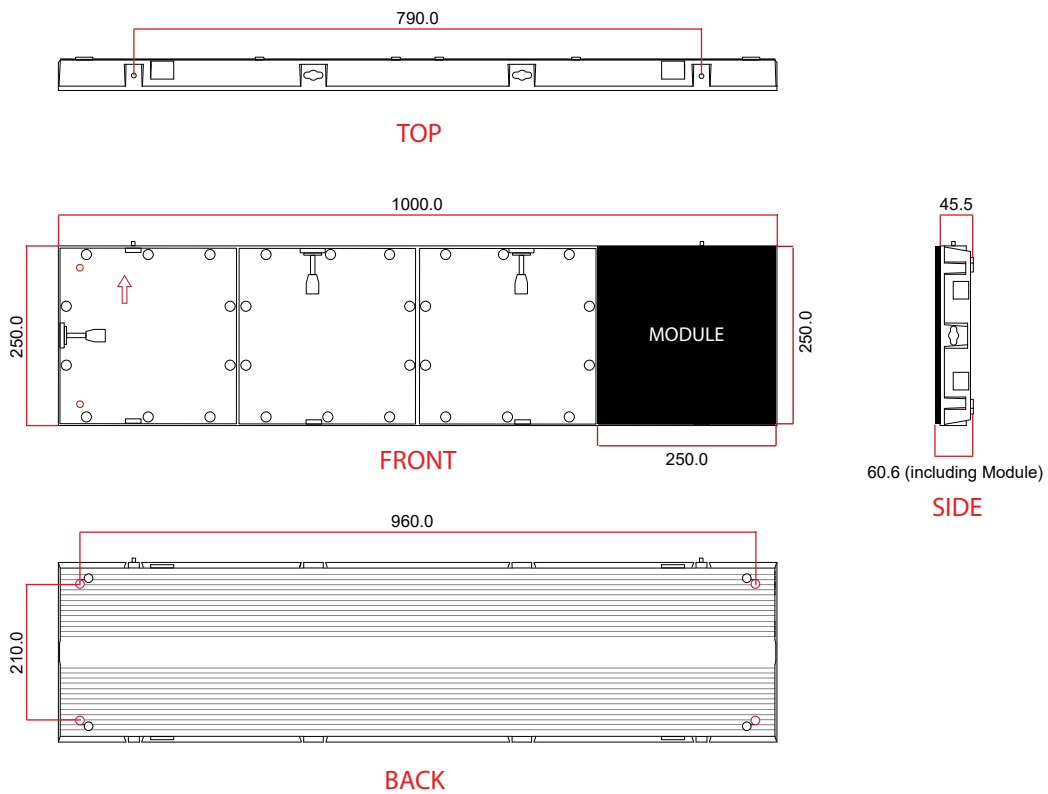

750x250MM CABINET

