

# VISTABLAZE SERIES

HIGH BRIGHTNESS OUTDOOR | DIRECT VIEW LED CABINET



[WWW.TINNOX.COM.AU](http://WWW.TINNOX.COM.AU) | © UFL TECHNOLOGY PTY LTD. All rights reserved.  
All specifications and descriptions are subject to change without prior notice. Unauthorized reproduction is strictly prohibited.


**TINNOX**

# SPECIFICATIONS

Pixel pitch (mm)	4	5	6.67	8	10
Pixel configuration	1R1G1B				
Led lamp	SMD1921	SMD1921	SMD3535		
Pixel density (dot/m <sup>2</sup> )	22500			15625	10000
Module size (W×H) mm	320x160				
Module resolution (W×H) dot	80x80	64x64	48x48	40x40	32x32
Cabinet size (W×H) mm	1280x960 & 960x960				
Cabinet material	Steel				
Cabinet weight (kg/m <sup>2</sup> )	45				
Scan mode	1/10	1/8	1/6	1/5	1/2
Gray scale (bit)	14				
Protection level	IP65/65				
Maintenance	Front maintenance				
Brightness (nit)	5500				
Viewing angle (H/V)	≥160° / ≥160°				
Contrast ratio	≥5000:1				
Refresh ratio	3840Hz				
Input power (AC)	110V–220V				
Max. Power consumption (W/m <sup>2</sup> )	≤750				
Ave. Power consumption (W/m <sup>2</sup> )	≤230				
Working temperature	-20 °C~+80 °C				

# DIMENSIONS

## 1280x960MM CABINET

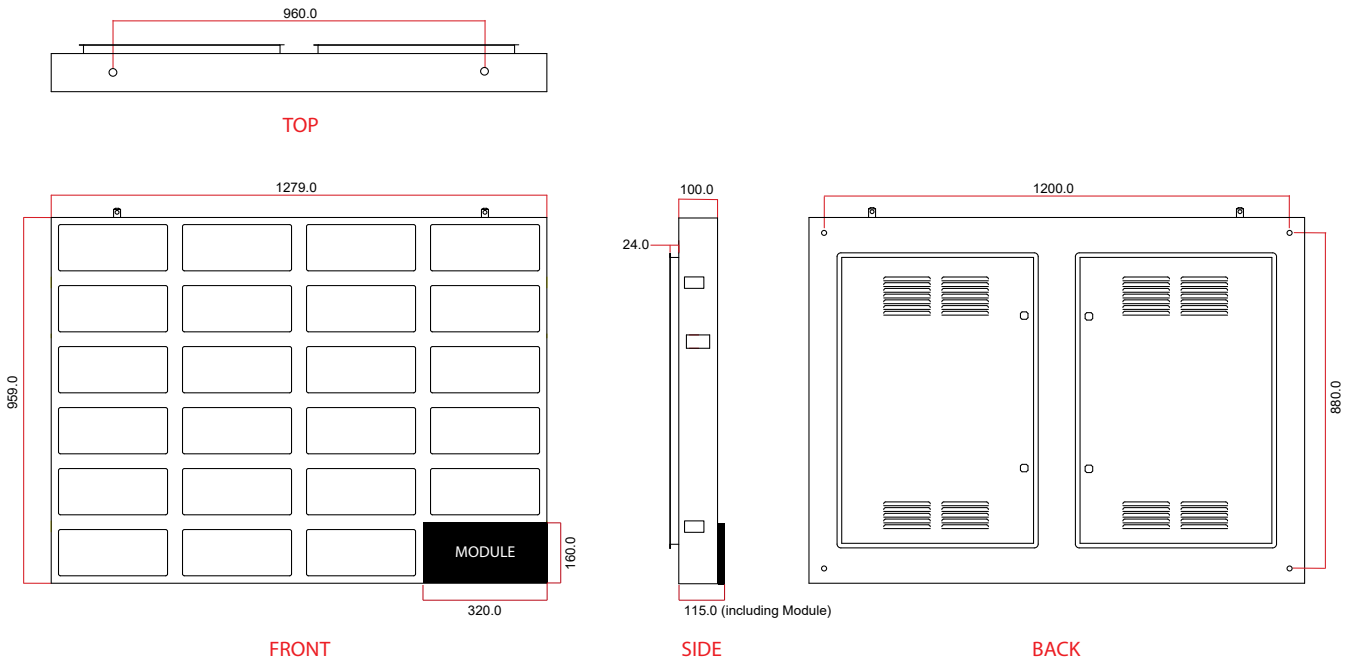

## 960x960MM CABINET

